

Commissioners Road, Pond Mills Road & Deveron Crescent Improvements



Public Update Meeting

November 6, 2025, from 5:00 - 6:30 p.m.

Design Progression

Step 1:

Detail Design Start

Step 2:

50% Design Milestone

Step 3:

90% Design Milestone
• Current Stage

Step 4:

100% Design Complete

Step 5:

Construction Tendering

Step 6

Construction Start – Spring 2026
• Subject to Permits and Approvals

Design Feature Overview

The project Key Design Features include:

- Replace watermains to increase capacity and reliability
- Construction of new boulevard cycle tracks and localized sidewalks
- Intersection improvements at Commissioners Road and Pond Mills Road
- New Traffic Signals at three intersections
- New Street Lighting



Intersection & Cycling Improvements Commissioners Road at Pond Mills Road

SYMBOLS NOTES/LEGEND:

1.  PROPOSED SYMBOL, BUS PATH & MULTI-USE PATH SYMBOLS (SR-20.3)
2. TRIANGULAR YELLOW LINES TO HAVE 0.30M BARE WIDTH, 0.45M HEIGHT AND 0.50M SPACING (WHITE)
3. SIGNAL, BICYCLE, AND MULTI-USE PATH SYMBOLS
4.  BUS SYMBOL (WHITE)
5.  DIRECTION ARROW (WHITE)
6.  PEDESTRIAN SYMBOL (WHITE)
7.  TRIANGULAR YELLOW LINES (WHITE)
8.  DIAMOND SYMBOL (WHITE)
9.  CHEVRON SYMBOL (WHITE)

SIGNAGE NOTES:

1. THE CONTRACTOR SHALL INSTALL ALL CHANNEL POSTS FOR LONDON TRANSIT BUS STOP SIGNS (LTC) STAFF TO RELOCATE SIGNS
2. BUS STOP SIGN TO BE LOCATED AT A MINIMUM HEIGHT OF 2.75m TOP OF SIGN
3. 4.  DIAMOND SIGN ON POST
4.  CHEVRON SIGN ON POST
5. (LEFT/RIGHT/LEFT AND RIGHT)
6. ALL SIGNS TO BE INSTALLED IN ACCORDANCE WITH CITY OF LONDON SUPPLEMENTAL STANDARDS FOR SIGNS AND THE C.M.


LINE MARKING NOTES:

1. 11.1.                                    
2.                                    
3.                                    

LINE MARKING LEGEND:

- | | |
|----------------------------|------------------------------------|
| 1. SOLID YELLOW, 150m | 10. 0.2-0.2-0.2 BROKEN WHITE, 200m |
| 2. 333 BROKEN YELLOW, 150m | 15. SOLID WHITE, 400m STOP LINES |
| 3. SOLID WHITE, 150m | 16. SOLID WHITE, 400m STOP LINES |
| 4. 333 BROKEN WHITE, 150m | 17. SOLID WHITE, 200m CROSSWALK |
| 5. 363 BROKEN WHITE, 150m | 18. SOLID WHITE, 200m CROSSWALK |
| 6. 363 BROKEN WHITE, 150m | 19. TURN ARROW (WHITE) |
| 7. 111 BROKEN WHITE, 150m | 20. TURN ARROW (WHITE) |
| 8. 111 BROKEN WHITE, 150m | 21. 1.51 BROKEN YELLOW, 150m |

ALL PERMANENT PAVEMENT MARKINGS INCLUDING SYMBOLS ON SURFACE APPLICABLE SHALL EXTEND 30M BEYOND THE LIMITS OF THE SIGNAL OR AS DIRECTED BY THE CONTRACT ADMINISTRATION

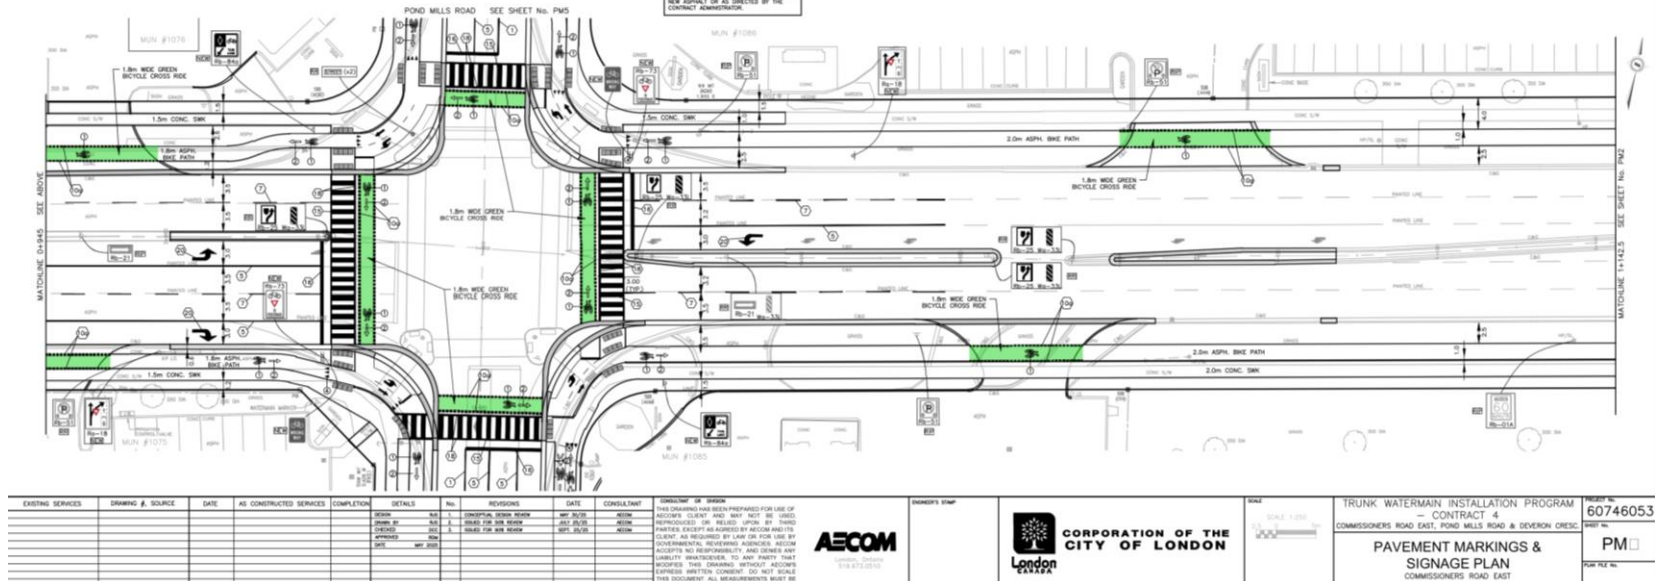


PRELIMINARY




CORPORATION OF THE
CITY OF LONDON

TRUNK WATERMAIN INSTALLATION PROGRAM
— CONTRACT 4
COMMISSIONERS ROAD EAST, POND MILLS ROAD & DEVERON CREEK
PAVEMENT MARKINGS &
SIGNAGE PLAN
COMMISSIONERS ROAD EAST


PROJECT No. 60746053
SHEET No. PM
DATE FILE No.

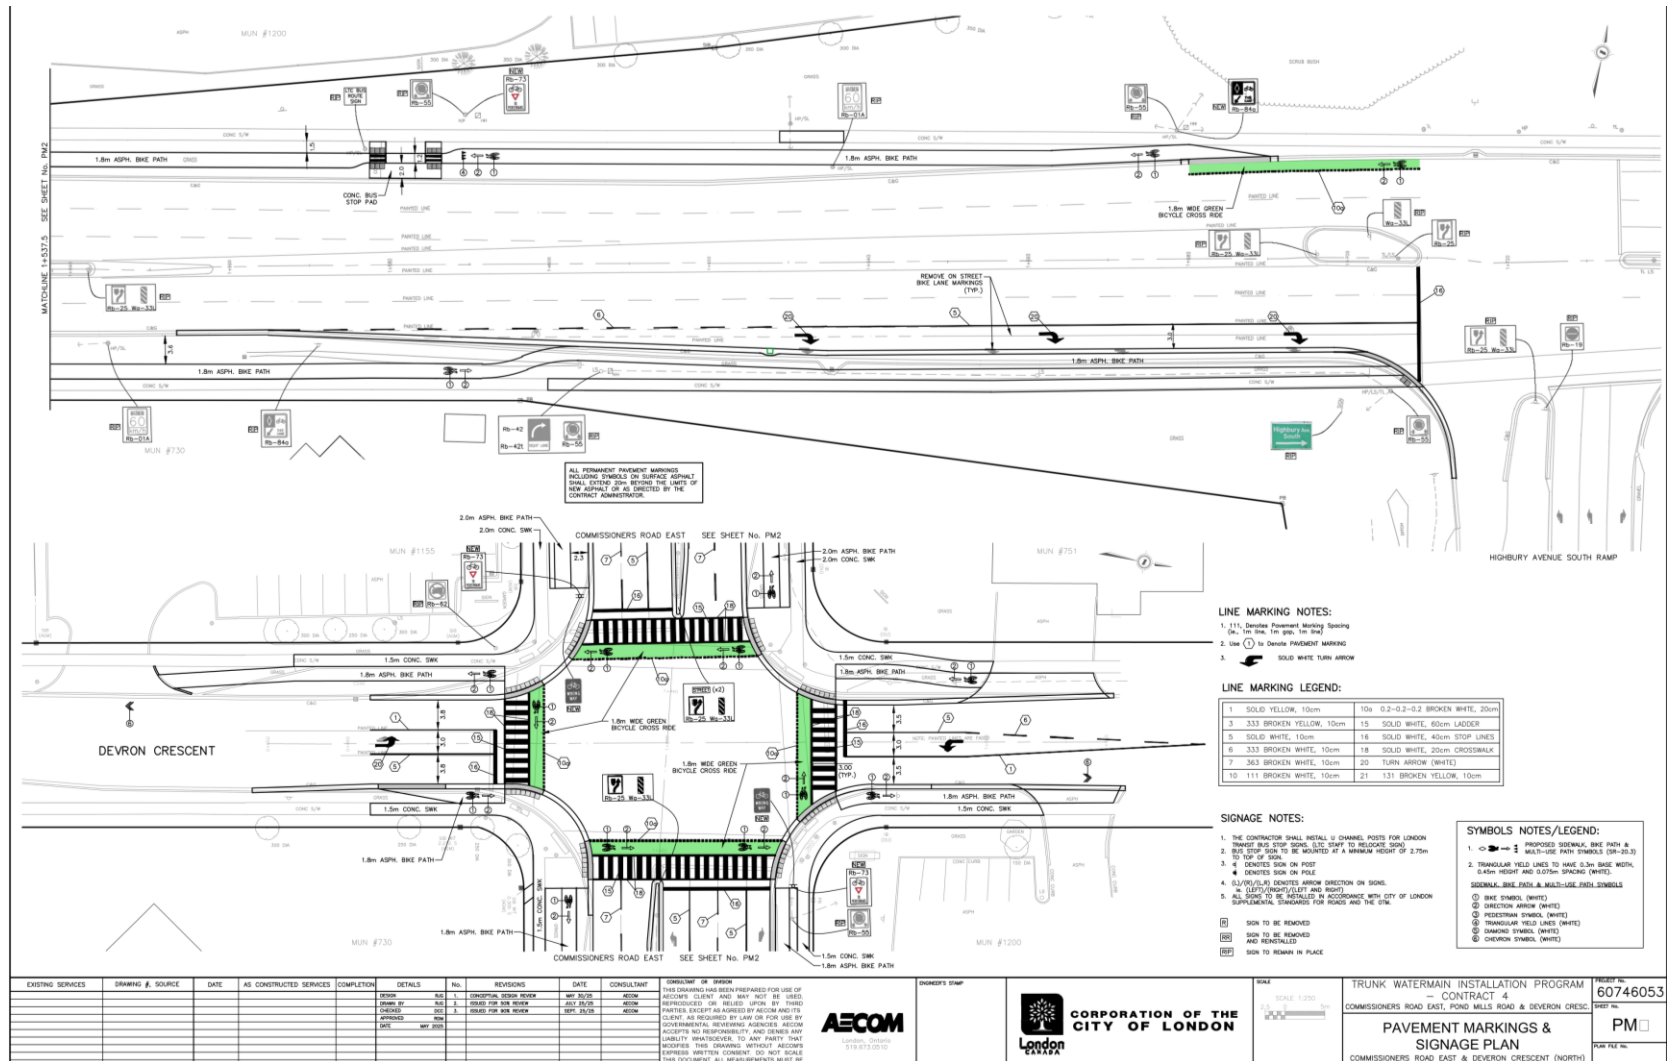



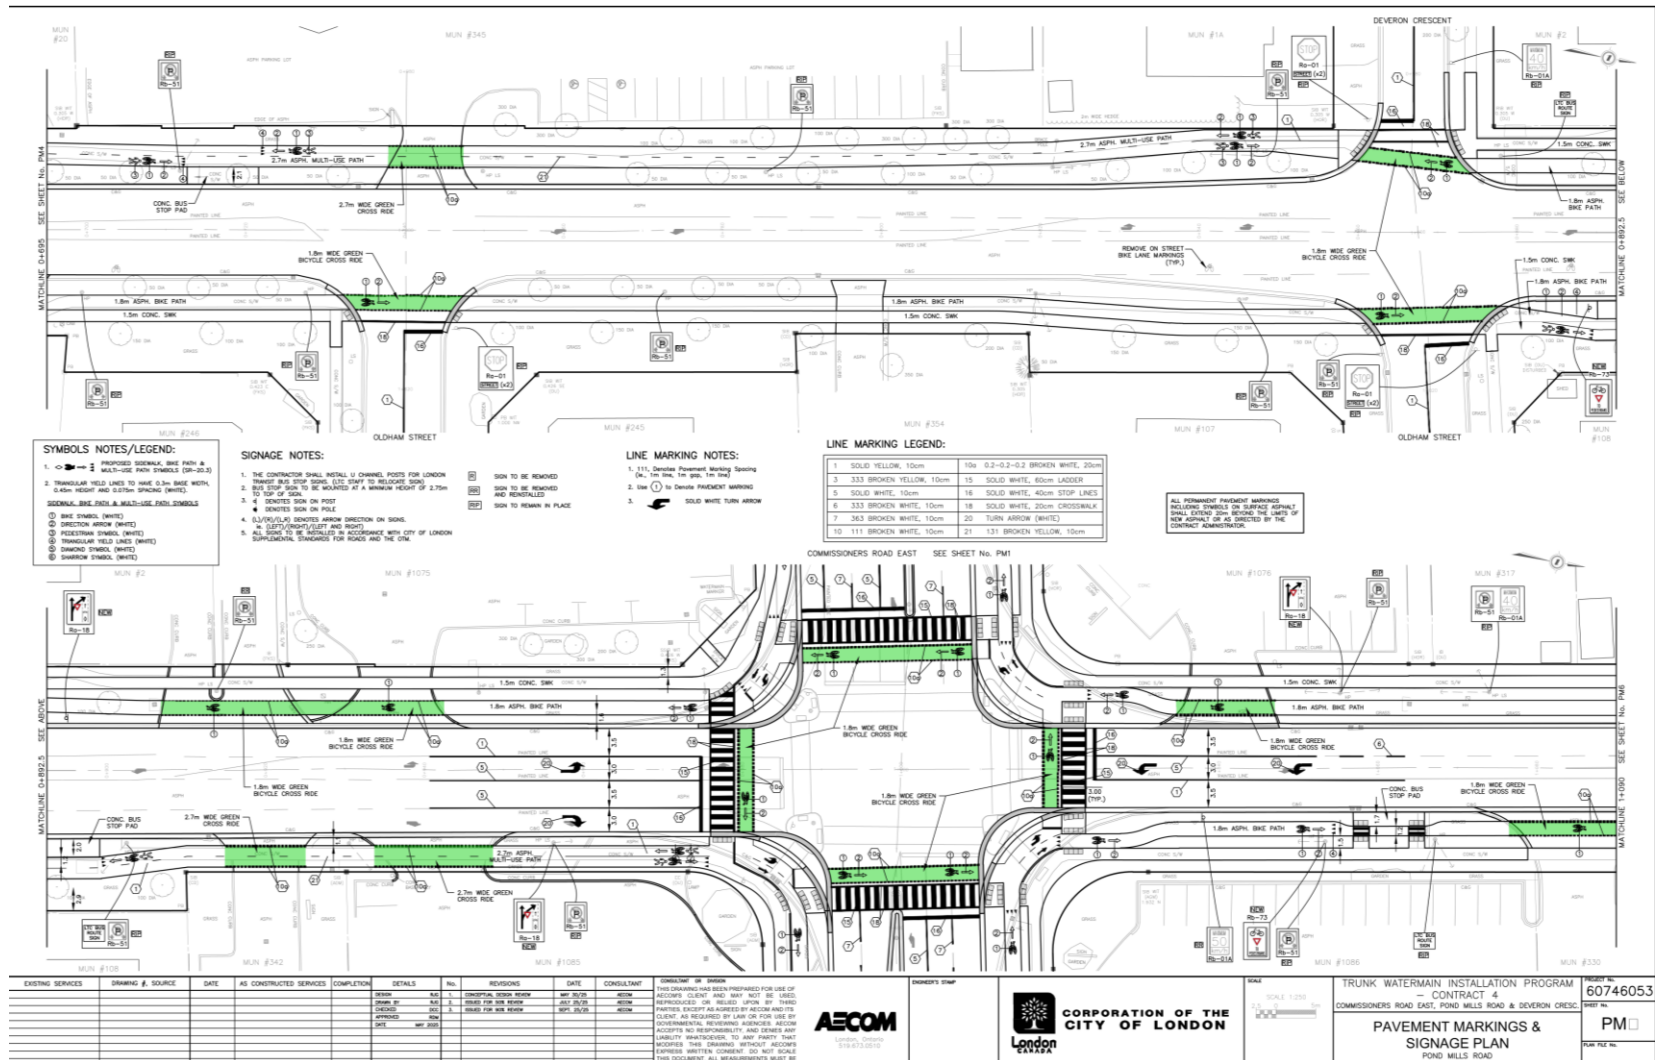



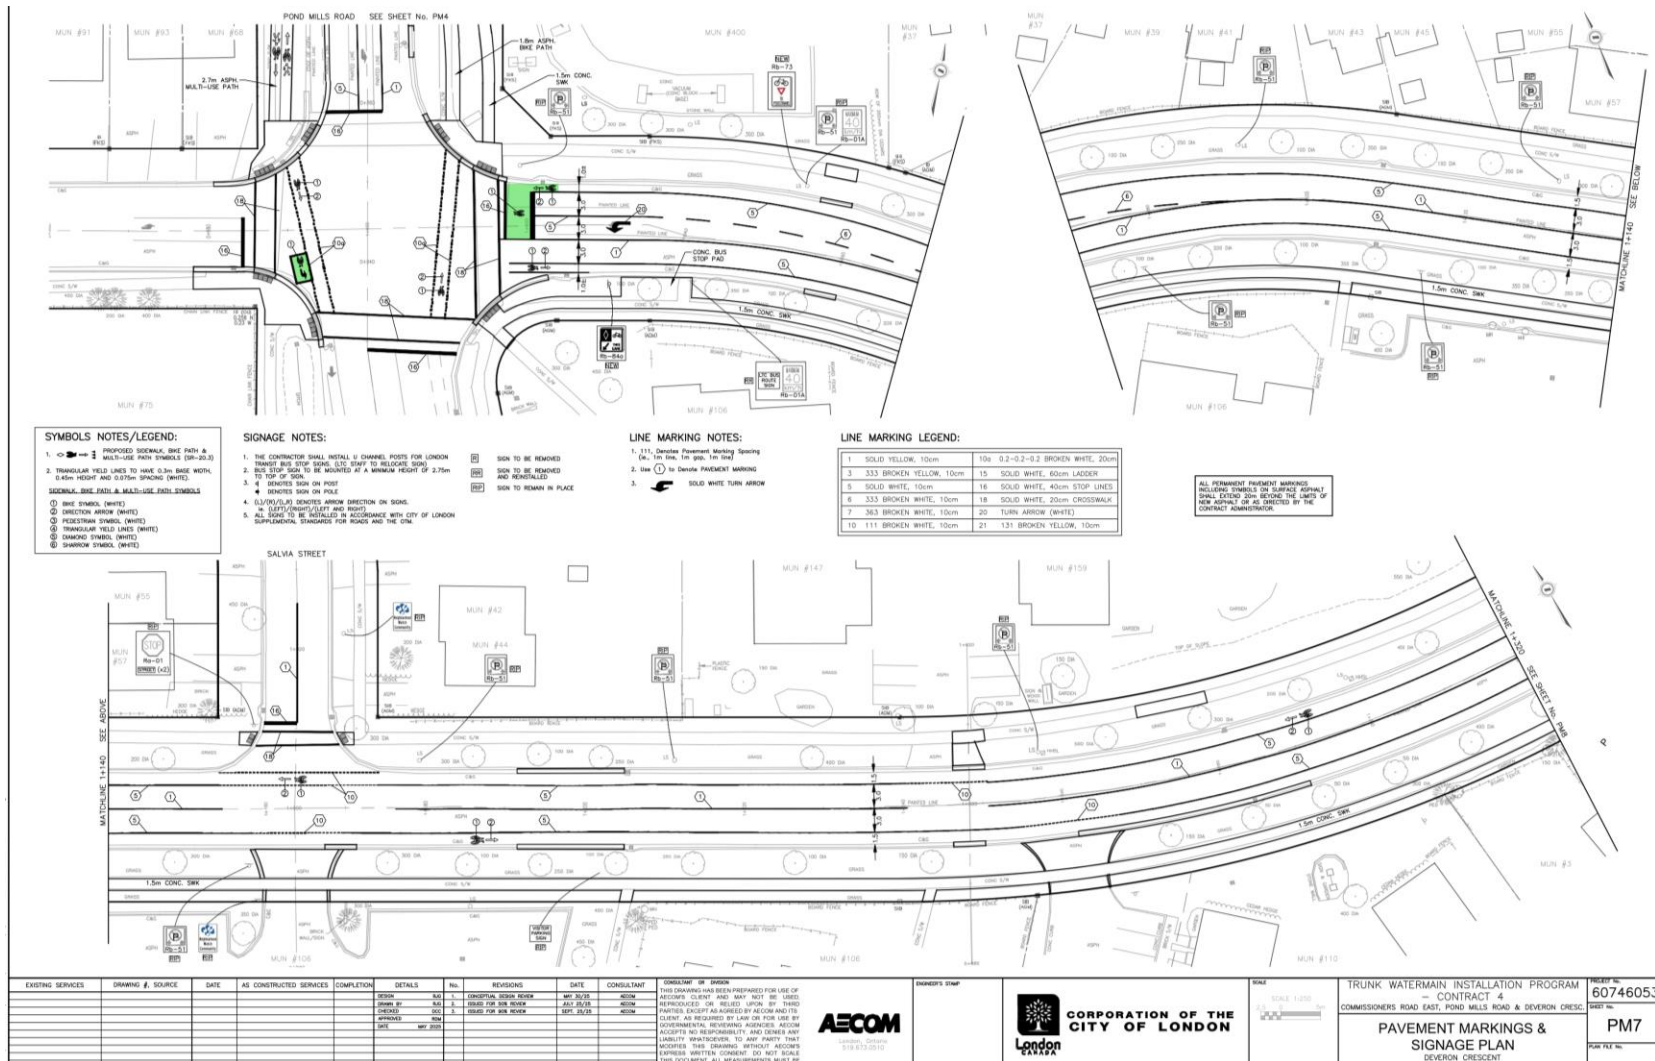


PRELIMINARY



Commissioners Road and Pond Mills Road Intersection – Renderings



Proposed Construction Staging - North

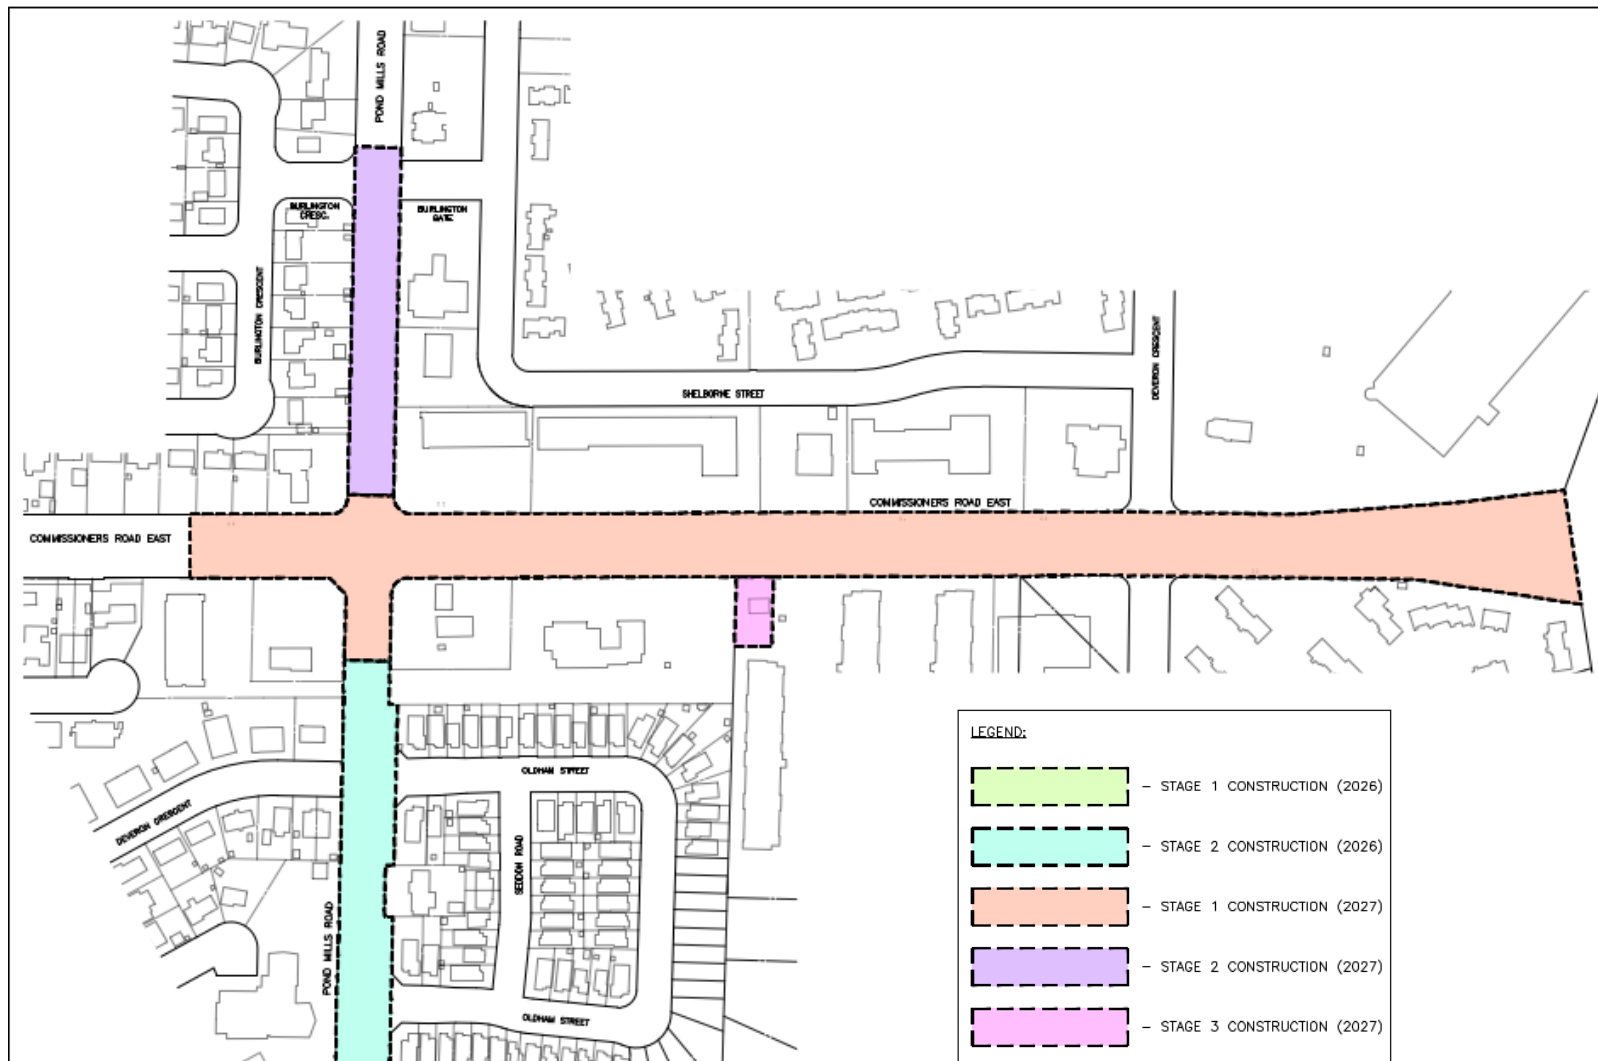

Proposed Construction Staging - South



Traffic Management

- Access to businesses and residences will be maintained at all times
- Emergency Services access will be maintained at all times
- Advance notification of lane disruptions and road closures will be provided
- Alternative route signing, and temporary traffic calming measures may be implemented where possible

Upcoming Activities Before Construction – Winter 2025 / 2026



Tree removals /
Trimming



Utility
Investigation



Utility
Relocation



Ways to Stay Connected

Project website:

getinvolved.london.ca/commissioners-pondmills-deveron-watermain

- Ask questions and leave comments for the project team.
- View the latest project materials.

Project managers:

If you have additional comments and questions, contact us! Any project materials can be made available in alternative formats upon request.

Maaike Vanjecek, C.Tech
Water Engineering Division
City of London
Tel: 519-661-2489 xt. 3864
Email: mvanjecek@london.ca

Josh Ackworth, C.E.T., PMP
Municipal Project Manager
AECOM Canada ULC
Phone: 519-494-3427
Email: Josh.Ackworth@aecom.com