



# **Pre-Construction Notice:**

## **2026 Infrastructure Renewal Project**


### **Dearness Drive**

**Date:** November 14, 2025

**To:** Business owner, resident and/or property owner

The City of London is planning to reconstruct Dearness Drive in your area to replace aging underground infrastructure that has exceeded its expected lifecycle. This letter provides important information about the project, what to expect during construction, and how to stay informed.

Project location: The map below shows the area where construction will take place. Work is planned on Dearness Drive from Bradley Avenue to Wellington Road.

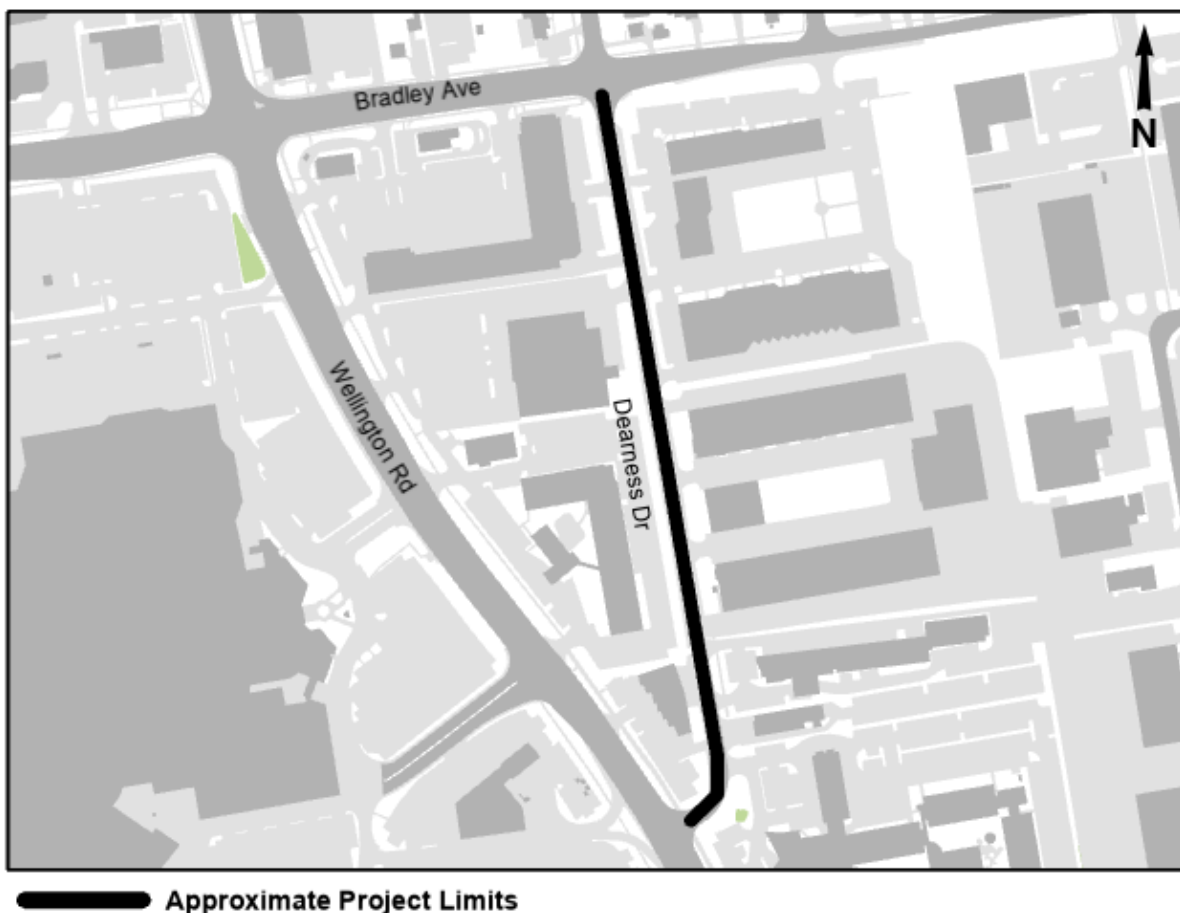

### **Proposed work details:**

Work to be completed as part of this road reconstruction project includes:

- Watermain replacement
- Water service replacement to property line
- Storm sewer replacement

- Partial replacement of existing private drain connections (PDC)
- New sidewalks and bike lanes
- New curbs and gutters
- Repaving the road with new asphalt
- Tree removals (see [Appendix A](#))

### **Anticipated project timeline:**

Next steps related to this project are:

- Pre-construction investigation and survey: Winter/Spring 2025
- City finalizes design: Summer/Fall 2025
- Project update meeting: See below
- Council review/approvals of contractor: Winter 2026
- Construction starts: Spring 2026, subject to tender and approvals
- Construction ends: Fall 2026, with some cleanup work in Spring 2027

### **Public update meeting:**

The City of London is hosting a public update meeting on Wednesday, December 3, 2025, to provide an update on the project and share information on construction.

Please join the City of London for a drop-in event to view construction plans, review necessary tree removals, discuss impacts to your property and to learn more about the project. Following the meeting, project boards displayed at the meeting will be available for download on the project website listed below.

**Date:** Wednesday, December 3

**Time:** 4:00 to 6:00 p.m.

**Location:** South London Community Centre, 1119 Jalna Blvd

If you require any special accommodation in accessing the project information or online material, please contact the City project manager listed below, and we will work together to best share the information with you. If you have specific questions about potential impacts to your property, please contact the City project manager listed below.

### **Contact information:**

The City is committed to keeping you informed during the project. Please reach out to your City project manager at any time, Monday through Friday.

#### **City Project Manager**

Name: Dave Jones, CET

Organization: City of London

Phone: 519-661-2489, ext. 4858

Email: [djones@london.ca](mailto:djones@london.ca)

#### **After hours or urgent matters**

Name: Dispatch

Organization: City of London

Phone: 519-661-5236

Email: [service@london.ca](mailto:service@london.ca)

## **Pre-construction survey**

If you have not completed the pre-construction survey already, we would appreciate you taking the time to fill out the questionnaire sent with the previous communication, to share any feedback you might have related to flooding, water supply, traffic or any other neighbourhood considerations.

## **Transportation impacts**

The City has evaluated how pedestrians, motorists, cyclists will be impacted by the construction of this project. We have determined Dearness Drive will remain open to local vehicle traffic only. There will be a few possible disruptions to driveway access at different points in the project. Residents who require accommodation (level entry, advanced notice, etc.) should contact the Project Manager to arrange for access during the construction period. Cyclists and pedestrians should exercise caution around construction sites and follow all construction signs. A Construction Notice will be issued before construction begins with additional information.

## **Stay informed:**

### **Website**

Visit the City's [Get Involved](https://getinvolved.london.ca/dearness) website (<https://getinvolved.london.ca/dearness>) to learn more about your construction project, find project notices and other related content. More information will be uploaded to this website as the project progresses.

### **Renew London interactive map**

Use the interactive map on [Renew London](https://london.ca/roadwork) ([london.ca/roadwork](https://london.ca/roadwork)) to search your street name to find current information about your construction project and other city-wide road work.

### **Navigation apps**

Use navigation apps such as Waze or Google Maps to find alternative routes during construction.

Thank you in advance for your cooperation. We look forward to completing these important infrastructure upgrades in your area as we work towards building a more sustainable city.

Sincerely,



David Gough, P. Eng

Environmental Services Engineer, Sewer Engineering Division

Copied: Kelly Scherr, Deputy City Manager, Environment and Infrastructure Services  
Councillor Steven Hillier (Ward 14)

Brad Walt, GEI Consultants Canada Ltd, Project Manager

## Appendix A: Construction impacts and resources

### Tree removals

During a project's design, staff from the City of London's engineering, forestry, and construction administration divisions, along with the project engineer and arborist, walk the site to determine the current health of the trees, and determine how to best install infrastructure while minimizing impacts to trees and structures. A total of 42 trees were assessed within the project limits.

After careful assessment, it was determined that there are trees within the City right-of-way that need to be removed for health reasons or due to construction conflicts. Anticipated tree removals are listed below and are subject to change. Drawings showing the tree removal locations will be available for viewing at the project update meeting and will be available on the project website following the meeting.

Tree size has been grouped into two categories: small trees with a diameter less than 12 inches / 30 cm and large trees with a diameter greater than 12 inches / 30 cm.

- Removal is required for a total of 1 small tree on Dearness Drive.

The trees will be marked with a white line around their trunk one week before removal. The required tree removals will be completed by March 31, before the migratory bird nesting period begins.

### Tree assessment findings

| Location             | Tree type  | Diameter (m)                                  | Reasons for removal                                     |
|----------------------|------------|-----------------------------------------------|---------------------------------------------------------|
| 1120 Wellington Road | Amur maple | 0.11, 0.21, 0.25, 0.27 (multiple trunk stems) | Poor condition and conflict with proposed water service |

### Tree replacement

When projects are completed, the City evaluates replacement and additional new tree planting opportunities on these streets. Each project is unique, and our approach to tree replacement is tailored to the context of the area we're working with. Tree plantings typically occur once the projects 1 year construction warranty is completed.

Each year, the City of London plants approximately 5,000 trees to help mitigate the impacts of climate change, provide shade and lower temperatures reducing energy costs at homes. Trees also help absorb heavy rainfall and reduce stormwater flows.

### Parking and loading

Through this project the roadway surface will be updated to meet City of London complete streets design guidelines. This will include introduction of curb and gutter, delineated property entrances and sidewalks and bike lanes. Property owners are encouraged to attend the public update meeting to learn more about the project and potential changes to the roadway surface.

### Dust, noise and vibrations

You may experience dust, noise, service interruptions and other inconveniences during construction. Construction equipment can also cause vibrations, so please ensure you protect any valuables susceptible to damage.

## **Work hours**

Work will typically take place from 7:00 a.m. to 7:00 p.m., Monday to Friday. If needed, some after-hours work may be required to accommodate the completion of the project within the established schedule and to minimize impacts of construction. The project team will notify residents, businesses and property owners ahead of any overnight, after-hours or weekend work.

## **Appendix B: Water & Sewer services**

### **Watermain**

The City will be replacing the watermain under your street and will also be replacing the public portion of the existing individual water services from the watermain up to the property line as part of this project, at no cost to you. The water service is the pipe that brings water into your home. The public portion of the water service runs from the public watermain to the property line in front of your home, and the private portion runs from the property line to the water meter inside your home.

Some of the properties on your street may have water services made of galvanized iron, which can corrode over time and restrict water flow. Other properties may have water services made of lead. For information on the health risks associated with lead, please visit the [Middlesex-London Health Unit](http://Middlesex-London Health Unit) ([healthunit.com/environment-lead](http://healthunit.com/environment-lead)) website. If you want to know whether you have a lead water service pipe, please contact 519-661-4739 or [leadtesting@london.ca](mailto:leadtesting@london.ca). If you have a lead water service pipe, the portion of water service from the property line to your house is your responsibility. A licensed plumbing contractor is required to complete lead pipe replacement.

If you choose to hire a contractor to replace the private portion of the lead water service on your property, you may be eligible to have your payments spread out over 10 years under the City's Lead Service Replacement Loan Program. Please contact 519-661-CITY (2489) Ext. 5357, or [mharriso@london.ca](mailto:mharriso@london.ca) for additional program details.

### **Electrical grounding**

Water service pipes were often used to ground electrical systems, but connections can deteriorate over time and pose a serious safety risk. It is the owner's responsibility to ensure the grounding system is adequate. This may be a good time for you to hire an electrician, at your cost, to check the condition of your building's electrical ground.

### **Sanitary and Storm private drain connections (PDC)**

A PDC (Property Drain Connection) is the pipe that connects your property to the City's sewer system. The sanitary PDC carries wastewater from sinks, toilets, and drains to the City's sanitary sewer. The storm PDC carries rainwater and melted snow to the City's storm sewer.

As part of this project, the City will partially renew all existing sanitary and storm PDCs from the sewer mains to about two meters behind the road curb. The exact endpoint may vary depending on underground or aboveground obstacles, such as gas lines, internet cables, or trees. This partial renewal is provided at no cost to you.

For more information on PDCs and your overall service laterals, see the included brochure. It explains property owner responsibilities for the overall service laterals and options to renew your PDCs beyond the project's partial renewal. Additional renewal is the responsibility of the property owner and is to be undertaken outside of the City project.

### **Basement flooding**

The City of London's [Basement Flooding Grant Program](https://london.ca/BFGP) ([london.ca/BFGP](https://london.ca/BFGP)) is designed to provide financial assistance to property owners to disconnect their weeping tiles from the City's sewer systems and to install a sump pit, sump pump and backwater valve. By doing this, you may decrease risk of basement flooding on your property.